


DIN 553 - sim. ISO 7434

Slotted set screws

with cone point

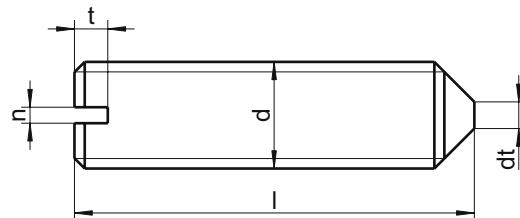

n	0,4	0,4	0,6	0,8	1,0	1,2	1,6	2,0
dt max.	0,25	0,30	0,40	0,50	1,50	2,00	2,50	3,00
t min.	0,72	0,80	1,12	1,28	1,60	2,00	2,40	2,80
t max.	0,95	1,05	1,42	1,63	2,00	2,50	3,00	3,60
⊖	0,4X2,0	0,4X2,0	0,6X3,5	0,8X4,0	1,0X5,5	1,2X7,0	1,6X9,0	2,0X12,0
Length /Ø	M2,5	M3	M4	M5	M6	M8	M10	M12
4		■●	■●					
5	■●	■●	■●	■●				
6	■●	■●	■●	■●	■●			
8	■●	■●	■●	■●	■●	■●		
10	■●	■●	■●	■●	■●	■●	■●	
12	■●	■●	■●	■●	■●	■●	■●	■●
16	■●	■●	■●	■●	■●	■●	■●	■●
20		■●	■●	■●	■●	■●	■●	■●
25			■●	■●	■●	■●	■●	■●
30			■●	■●	■●	■●	■●	■●
40			■●	■●	■●	■●	■●	■●
50			■●	■●	■●	■●	■●	■●
SU	500	200	200	200	200	100	50	50

■ A1 / ▲ A2 / ● A4 | SU: Sales unit | All measurements in mm | Other dimensions on request.

Example item no. 553-2-8X40 DIN 553 - A1 - M8 - l = 40mm