


sim. ISO 8750 - **DIN 7343**
 Spring-type straight pins
 medium duty

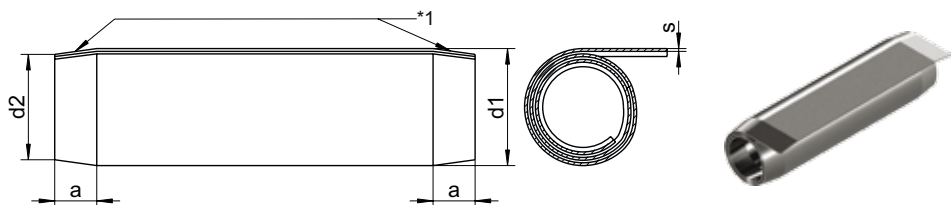

a	0,3	0,5	0,7	0,8	1,0	1,3	1,7	2,0	3,0
d2	0,95	1,40	1,90	2,35	2,85	3,80	4,80	5,80	7,75
s	0,08	0,13	0,17	0,21	0,25	0,33	0,42	0,50	0,67
d1 min.	1,10	1,62	2,15	2,65	3,15	4,20	5,25	6,25	8,35
Length / Ø	1	1,5	2	2,5	3	4	5	6	8
4	▲	▲	▲						
5	▲	▲	▲	▲					
6	▲	▲	▲	▲					
8	▲	▲	▲	▲	▲	▲			
10		▲	▲	▲	▲	▲	▲		
12		▲	▲	▲	▲	▲	▲	▲	
14		▲	▲	▲	▲	▲	▲	▲	
16		▲	▲	▲	▲	▲	▲	▲	
18			▲	▲	▲	▲	▲	▲	▲
20			▲	▲	▲	▲	▲	▲	▲
22				▲	▲	▲	▲	▲	▲
24				▲	▲	▲	▲	▲	▲
26					▲	▲	▲	▲	▲
28					▲	▲	▲	▲	▲
30					▲	▲	▲	▲	▲
32					▲	▲	▲	▲	▲
35						▲	▲	▲	▲
36						▲	▲	▲	▲
40						▲	▲	▲	▲
45						▲	▲	▲	▲
50						▲	▲	▲	▲
SU	1000	1000	1000	1000	1000	500	500 ≥ 50 250	500 ≥ 40 250	500 ≥ 26 250

■ A1 / ▲ A2 / ● A4 | SU: Sales unit | All measurements in mm | Other dimensions on request.

Example item no. 7343-2-8X40 DIN 7343 - A2 - Ø 8mm - l = 40mm - *1 beveled edges