



sim. ISO 15481 - DIN 7504 N H

Self drilling screws type N

pan head with cross recess H (Phillips)

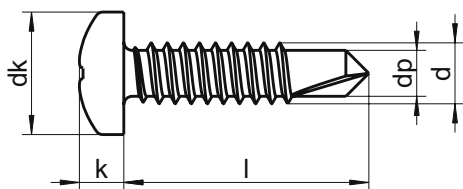

dp	2,3	2,8	3,1	3,6	4,1
dk max.	5,6	6,9	7,5	8,2	9,5
k max.	2,2	2,6	2,8	3,05	3,55
⊕	P 1	P 2	P 2	P 2	P 2
Length / Ø	ST2,9	ST3,5	ST3,9	ST4,2	ST4,8
9,5 (3/8")	▲	▲			
13 (1/2")	▲	▲	▲	▲	▲
16 (5/8")		▲	▲	▲	▲
19 (3/4")		▲	▲	▲	▲
22 (7/8")		▲	▲	▲	▲
25 (1")		▲	▲	▲	▲
32 (1 1/4")			▲	▲	▲
38 (1 1/2")			▲	▲	▲
45 (1 3/4")					▲
50 (2")					▲
60 (2 3/8")					▲
70 (2 3/4")					▲
SU	1000	1000	1000	500	200

■ A1 / ▲ A2 / ● A4 | SU: Sales units | All measurements in mm / inch | Other measurements on request.

Example item no. 7504-2-4,2X38N DIN 7504 - A2 - Ø 4,2mm - l = 38mm - form N - phillips drive

Please note that self drilling screws, made of stainless steel are mainly suitable for the processing in aluminium and thin stainless steel sheets. Self drilling screws with pan head in other dimensions and A4 are available on request. Self drilling screws with pan head and TX can be found as WS 9166 in this catalogue.