


# DIN 7982 H - sim. ISO 7050

## Tapping screws

countersunk head with cross recess H (Phillips), type C (with cone point)

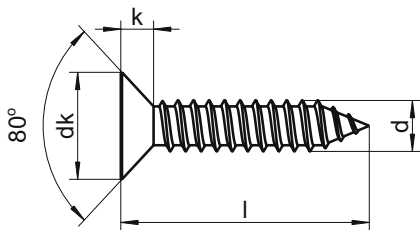

dk	4,3	5,5	6,8	7,5	8,1	9,5	10,8	12,4
k	1,3	1,7	2,1	2,3	2,5	3,0	3,4	3,8
⊕	P 1	P 1	P 2	P 2	P 2	P 2	P 3	P 3
Length / Ø	<b>ST2,2</b>	<b>ST2,9</b>	<b>ST3,5</b>	<b>ST3,9</b>	<b>ST4,2</b>	<b>ST4,8</b>	<b>ST5,5</b>	<b>ST6,3</b>
6,5 (1/4")	▲●	▲●	▲●	▲●				
9,5 (3/8")	▲●	▲●	▲●	▲●	▲●	▲●		
13 (1/2")	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
16 (5/8")	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
19 (3/4")	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
22 (7/8")	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
25 (1")	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
32 (1 1/4")	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
38 (1 1/2")		▲●	▲●	▲●	▲●	▲●	▲●	▲●
45 (1 3/4")			▲●	▲●	▲●	▲●	▲●	▲●
50 (2")			▲●	▲●	▲●	▲●	▲●	▲●
55 (2 1/8")			▲●	▲●	▲●	▲●	▲●	▲●
60 (2 3/8")			▲●	▲●	▲●	▲●	▲●	▲●
70 (2 3/4")			▲●	▲●	▲●	▲●	▲●	▲●
80 (3 3/8")					▲●	▲●	▲●	▲●
90 (3 1/2")					▲●	▲●	▲●	▲●
100 (4")					▲●	▲●	▲●	▲●
120 (4 3/4")						▲●	▲●	▲●
SU	1000	1000	1000 ≥ 32 500	1000 ≥ 32 500	1000 ≥ 32 500 ≥ 50 200	1000 ≥ 22 500 ≥ 32 200	200 ≥ 32 100	200 ≥ 32 100

■ A1 / ▲ A2 / ● A4 | SU: Sales units | All measurements in mm / inch | Other dimensions on request.

Example item no. 7982-2-4,2X38 DIN 7982 - A2 - Ø 4,2mm - l = 38mm