WASI

PANHEAD CHIPBOARD SCREWS TX, FULL THREAD

DATASHEET
WS 9112

IHRE VERBINDUNG ZUM ERFOLG
YOUR ACCESS TO SUCCESS

WS 9112
TECHNICAL SPECIFICATIONS

Panhead chipboard screws with TX drive are mainly used in general timber construction for various types of timber constructions. The Panhead serves a purely decorative purpose. Full-thread screws are particularly suitable for fastening fittings and hinges. In order to prevent splicing and splintering, we recommend pre-drilling accordingly.

Material	stainless steel
Quality	A2
Thread type	wood thread
Surface	clean and bright
General requirements	ISO 8992
Mechanical attributes	ISO 3506-1
General tolerance	ISO 4759-1
Hexalobular internal drive	ISO 10664
Edges	ISO 13715

YOUR ADVANTAGES

TX-DRIVE = FASTER SCREWING

› Improved torque transmission
› Optimal centering
› Minimises drive and bit wear

UNIVERSALLY APPLICABLE

PRACTICES

WOOD AND FURNITURE CONSTRUCTIONS

WE'LL BE PLEASED TO ADVISE FOR YOUR APPLICATION.
T +49(0)202 / 26 32-0
info@wasi.de
www.wasi.de

DIMENSIONS (MM)

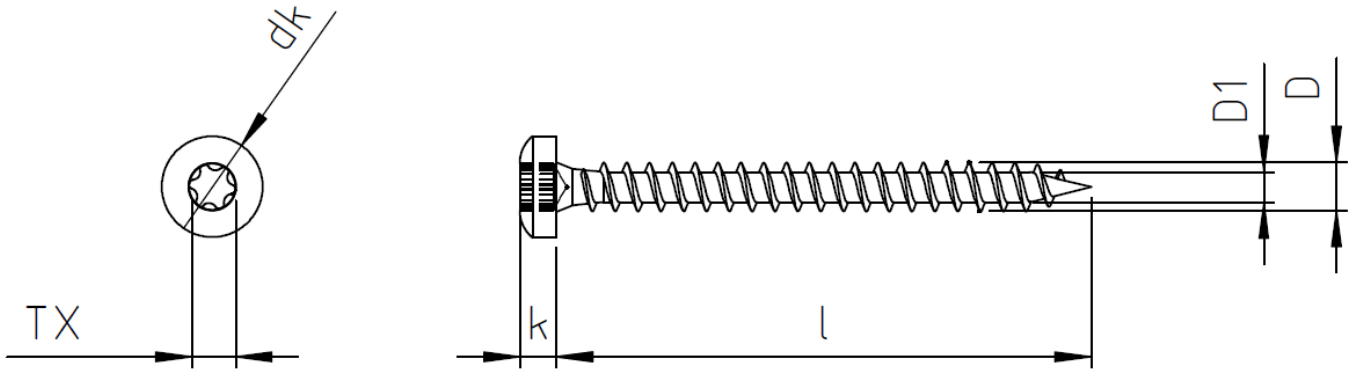

Diameter D	3	3,5	4	4,5	5	6
k	2,10 – 2,50	2,20 – 2,60	2,60 – 3,00	2,70 – 3,10	3,30 – 3,70	4,00 – 4,40
dk	5,60 – 6,00	6,42 – 7,00	7,42 – 8,00	8,42 – 9,00	9,42 – 10,00	11,30 – 12,00
D_1	1,80 – 2,00	2,00 – 2,20	2,30 – 2,50	2,50 – 2,70	2,80 – 3,10	3,50 – 3,80
Ø	2	2	2	2	3	3
TX	TX 10	TX 10	TX 20	TX 20	TX 25	TX 25

WE'LL BE PLEASED TO ADVISE FOR YOUR APPLICATION.
T +49(0)202 / 26 32-0
info@wasi.de
www.wasi.de

DIMENSIONS (MM)

Length l / Ø	3	3,5	4	4,5	5	6
10 ± 0,7	X					
12 ± 0,7	X	X	X			
13 ± 0,7	X	X	X			
16 ± 0,7	X	X	X	X		
20 ± 0,7	X	X	X	X	X	X
25 ± 1,0	X	X	X	X	X	X
30 ±1,0	X	X	X	X	X	X
35 ± 1,0		X	X	X	X	X
40 ± 1,0		X	X	X	X	X
45 ± 1,0			X	X	X	X
50 ± 1,0			X	X	X	X
60 ± 1,2			X	X	X	X
70 ± 1,2			X	X	X	X
80 ± 1,2					X	X
90 ± 1,5					X	X
100 ± 1,5						
110 ± 1,5						
120 ± 1,5						
130 ± 1,7						

X = available ex stock

Further dimensions are available on request