



DOWEL SCREW WITH HEXAGON HEAD



DATASHEET
WS 9216

WS 9216

TECHNICAL SPECIFICATIONS

Dowel screws with hexagon head for fixation of i.e. photovoltaic constructions or sanitary facilities. The WS9216 is made of a dowel screw (WS9211), three hexagon nut

with flange and serration (WS9345) and an EPDM sealing washer

Material	Stainless steel
Quality	A2
Surface	Blank
General requirements	ISO 8992
Mechanical attribute	ISO 3506-1
General tolerance	ISO 4759-1
Product class	A

YOUR ADVANTAGES



EASY TO SCREW IN

- › Fastening without special tools



CONNECTION BETWEEN VARIOUS MATERIALS

- › Made possible by two different types of thread (Metric / Wood)



READY-FOR-USE

- › The components are preassembled



GENERAL BUILDING INSPECTORATE APPROVAL

- › Approved for use in public buildings by DIBt (conformity symbol)

PRACTICES




FASTENING OF PHOTOVOLTAIC CONSTRUCTIONS

WE'LL BE PLEASED TO ADVISE FOR YOUR APPLICATION.

T +49(0)202 / 26 32-0
info@wasi.de
www.wasi.de



DIMENSIONS (MM)

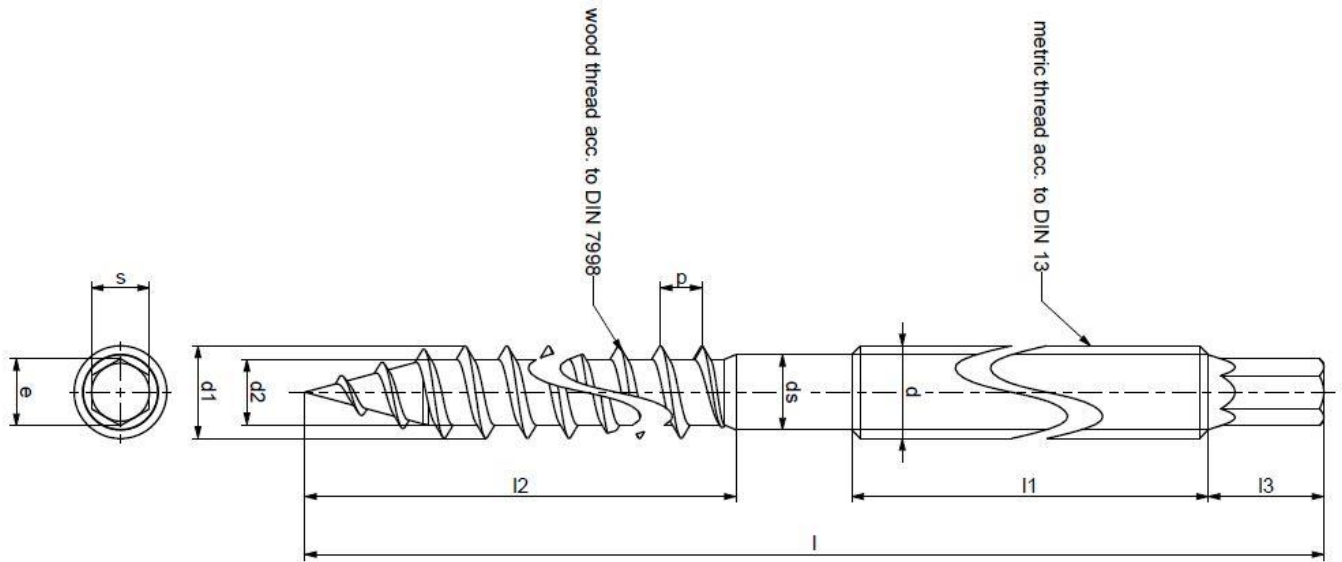

Thread d	$l \pm 5$	$l1 \pm 2$	$l2 \pm 2$	$l3 \pm 0,2$	d1	d2	ds	p	s	e	A/F
M10	180	100	60	10,0	10,0	7,00	8,95	4,5	7,0	7,66	7
M10	200	110	70	10,0	10,0	7,00	8,95	4,5	7,0	7,66	7
M10	250	130	80	10,0	10,0	7,00	8,95	4,5	7,0	7,66	7
M10	300	140	100	10,0	10,0	7,00	8,95	4,5	7,0	7,66	7
M12	180	100	60	10,0	12,0	9,00	10,80	5,0	9,0	9,92	9
M12	200	110	70	10,0	12,0	9,00	10,80	5,0	9,0	9,92	9
M12	250	130	100	10,0	12,0	9,00	10,80	5,0	9,0	9,92	9
M12	300	140	100	10,0	12,0	9,00	10,80	5,0	9,0	9,92	9
M12	350	180	130	10,0	12,0	9,00	10,80	5,0	9,0	9,92	9
M12	400	180	130	10,0	12,0	9,00	10,8	5,0	9,0	9,92	9

WE'LL BE PLEASED TO ADVISE FOR YOUR APPLICATION.

T +49(0)202 / 26 32-0
 info@wasi.de
 www.wasi.de

