


# WS 9479 - sim. DIN 7983

## Tapping screws

raised countersunk head with TX

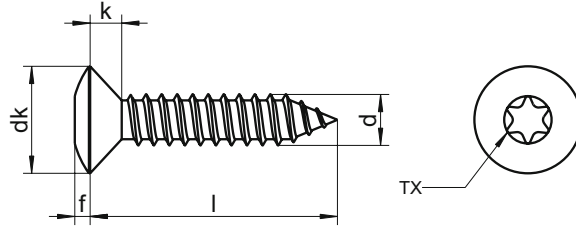

dk max.	6,8	7,5	8,1	9,5	10,8	12,4
k max.	2,1	2,3	2,5	3,0	3,4	3,8
f	1,2	1,3	1,4	1,5	1,7	2,0
TX	TX 15	TX 15	TX 20	TX 20	TX 25	TX 30
Length / Ø	<b>ST3,5</b>	<b>ST3,9</b>	<b>ST4,2</b>	<b>ST4,8</b>	<b>ST5,5</b>	<b>ST6,3</b>
13 (1/2")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
16 (5/8")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
19 (3/4")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
22 (7/8")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
25 (1")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
32 (1 1/4")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
38 (1 1/2")	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
45 (1 3/4")		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
50 (2")		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
60 (2 3/8")			▲ ●	▲ ●	▲ ●	▲ ●
SU	1000 ≥ 32 500	1000 ≥ 32 500	1000 ≥ 32 500	500 ≥ 32 200	200 ≥ 32 100	200 ≥ 32 100

■ A1 / ▲ A2 / ● A4 | SU: Sales units | All measurements in mm / inch | Other dimensions on request.

Example item no. 9479-2-4,2X38 WS 9479 - A2 - Ø 4,2mm - l = 38mm