



ROOF HOOK – 3-WAY ADJUSTABLE



DATASHEET
WS 9525

WS 9525

TECHNICAL SPECIFICATIONS

Material	Stainless Steel
Quality	A2 / 1.4301 / AISI 304
Model	Punched, bent and sandblasted
Weight (Kg/pc)	0,776

YOUR ADVANTAGES



3-WAY ADJUSTABLE

› By means of long hole drillings



READY-FOR-USE

› Components are pre-assembled

PRACTICES




TILED ROOFS FROM A ROOF PITCH OF 20°

WE'LL BE PLEASED TO ADVISE FOR YOUR APPLICATION.

T +49(0)202 / 26 32-0
info@wasi.de
www.wasi.de



DIMENSIONS (MM)

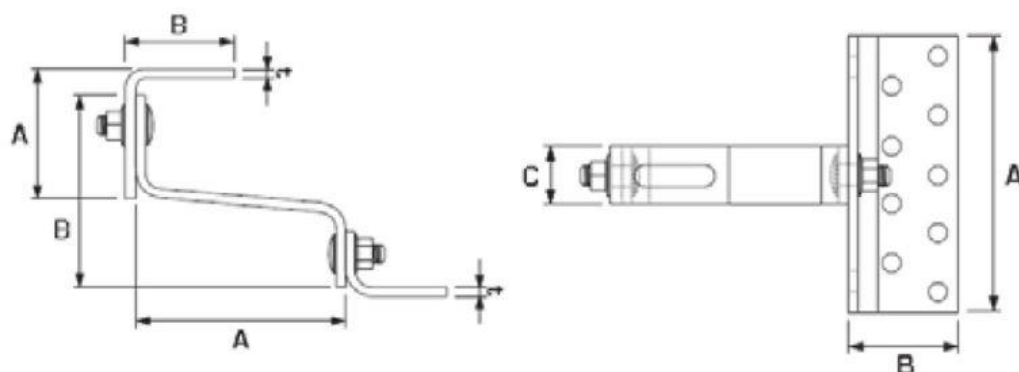

Component / Dimension	A	B	C	t	Hole-Ø
Disc	138	56	-	5	9 mm / 11 mm
Hook	115	103	30	5	11 mm
Angle bracket	73	59	30	5	10,5 x 30 mm / 10,5 x 37,5 mm

WE'LL BE PLEASED TO ADVISE FOR YOUR APPLICATION.

T +49(0)202 / 26 32-0
info@wasi.de
www.wasi.de

